

StrapPack[®]

Automatic Strapping Machine



RQ-8X

RQ-8X



The evolution of RQ-8 with Advanced Technology

■ Amazing Strapping Speed


Up to 1.1seconds per strapping cycle. That's 54 straps per minute!

■ Self-Correcting Technology

Unique self-correcting mechanisms are built into the RQ-8X operation. If the RQ-8X is operated accidentally without a package on the table, the strap will form a small loop which will be automatically ejected from the sealing unit leaving the machine ready for the next cycle.

■ Easy Strap Loading

Strap loading system free of complicated devices makes strap threading almost completely automatic - it's just a touch of a lever.

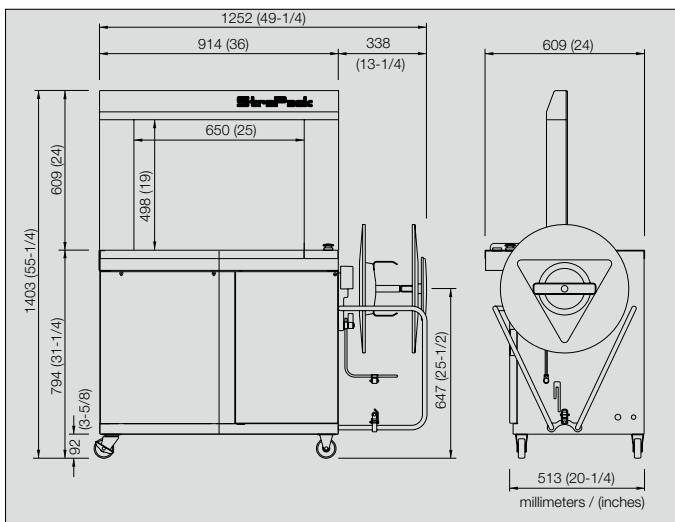

■ Standard Specifications

Dimension	Width	1252 mm	49-1/4 in.
	Height	1403 mm	55-1/4 in.
	Depth	609 mm	24 in.
	Weight	170 kg	374 lbs.
Table Height		794 mm	31-1/4 in.
Arch Size		W 650 X H 500 mm	W 25 X H 20 in.
Package Size	Max	W 620 X H 480 mm	W 24-1/2 X H 18-7/8 in.
	Min	W 80 X H 30 mm	W 3-1/8 X H 1-1/4 in.
Joint / Strap/ Coil		heat seal / polypropylene ID 200 X OD 450 X W 200 mm	heat seal / polypropylene ID 8 X OD 18 X W 8 in.
Strap Width		5, 6, 9, 12 mm	1/4, 3/8, 1/2 in.
Strap Tension		up to 784 N (80 kgf), 150 mm stroke	up to 176lbs. 6 in. stroke
Speed		Up to 54 straps per min	
Power Supply		100, 120, 200, 220, 230, 240V single phase 50 / 60Hz 0.9KVA	

Dimensions and specifications are subject to change without notice.

Modification rights reserved.

Pats., U.M. & design registered and/or pending.

© 2012 Strapack Corporation

DISTRIBUTED BY:

STRAPACK CORPORATION

7-16-14, Ginza, Chuo-ku Tokyo 104-0061, JAPAN

Phone 81-3-6278-1805 Fax. 81-3-6278-1806

(URL) <http://www.strapack.com> (E-mail) info@strapack.com

STRAPACK INC.

30860 San Clemente St. Hayward, CA 94544 U.S.A.

Phone 1-510-475-6000 Fax. 1-510-475-6090

STRAPACK, N.V./S.A.

Uilenbaan 200, 2160 Wommelgen, BELGIUM

Phone 32-3-355-1520 Fax. 32-3-355-1521